

Solv-Jet | TSK2477

Your Solvent Solution

FOR HP45SI TECHNOLOGY



DARK IMPRESSIONS, FAST DRYING

SOLV-JET is a solvent black ink for HP45si technology, producing a high density, fast drying impression on non-porous media.



SOLV-JET | TSK2477

FOR HP45SI

Performance Data

Optical Density

Decap Time

Dry Time


Substrate Adhesion

Substrate Wetting

Technical Specifications

Ink Type	Solvent
Color	Black ■
Colorant	Dye
Firing Parameters	Voltage: 8.4V Pulse: 1.8µs
Pulse Warning	On
Open Time	~5mins
Shelf Life	24mo from MFG
Bulk Use	Suitable
Storage Conditions	10°C ~ 30°C
Operating Conditions	10°C ~ 40°C
Maintenance	Gently wipe printhead with a dry, lint-free cloth
Downtime	<1 day down: leave cartridges in printer, wipe and purge before next use. >1 day down: remove cartridges from machine and seal with cartridge clip. Wipe and purge before next use.

Note: Performance results dependant on individual application e.g. substrate, environment, orientation.

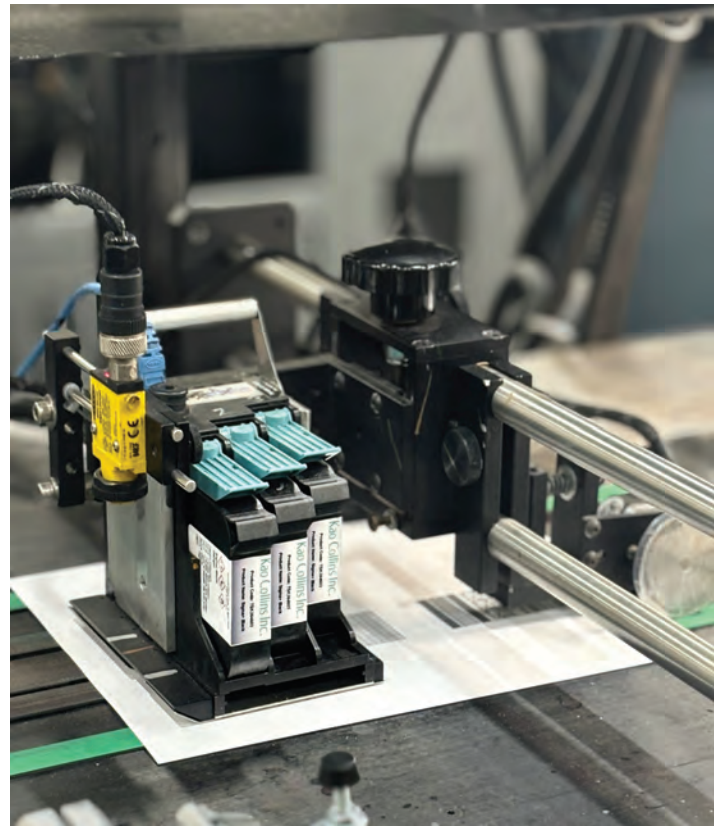

Target Applications

Marking and Coding

Packaging

Labeling

For Nonporous Media

Flexible Films

PE

PP

PET

Overcoat Varnishes

AQ

EC

Plastics

Acrylic

ABS

PC

PVC

Rubber

Glass

Metals

Regulatory Compliance

EuPIA

PFAS Free

Non-CMR

REACH SVHC

